



Declaration Owner

Aeroflex USA

282 Industrial Park Rd,
Sweetwater, TN 37874 United States
www.aeroflexusa.com | +1.423.337.2493

Products

Aeroflex insulation accessory products

- ☐ Aeroflex® Cel-Link II®
- ☐ Aerocel® Protape®
- ☐ Aerocel® Aeroseal LVOC™ Black
- ☐ Aerocel® Aerocoat™

Functional Units

Aeroflex® Cel-Link II® & Aerocel® Protape®

1 m² of product installed for use over 75 years

Aerocel® Aeroseal LVOC™ Black & Aerocel® Aerocoat™

1 L of product for use over 75 years

EPD Number and Period of Validity

SCS-EPD-07137

EPD Valid June 15, 2021 through June 14, 2026

Version: June 18, 2021

Product Category Rule

ISO 21930:2017. Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services.


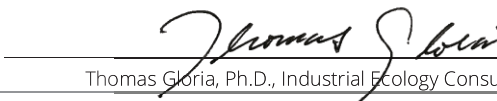
Program Operator

SCS Global Services

2000 Powell Street, Ste. 600, Emeryville, CA 94608

+1.510.452.8000 | www.SCSglobalServices.com



| | |
|---|--|
| Declaration Owner: | Aeroflex USA |
| Address: | 282 Industrial Park Rd, Sweetwater, TN 37874 |
| Declaration Number: | SCS-EPD-07137 |
| Declaration Validity Period: | June 15, 2021 through June 14, 2026 |
| Version: | June 18, 2021 |
| Program Operator: | SCS Global Services |
| Declaration URL Link: | https://www.scsglobalservices.com/certified-green-products-guide |
| LCA Practitioner: | Gerard Mansell, Ph.D., SCS Global Services |
| LCA Software and LCI database: | OpenLCA v1.10 software and the Ecoinvent v3.6 database |
| Product RSL: | 25 years |
| Markets of Applicability: | North America; |
| EPD Type: | Product-Specific |
| EPD Scope: | Cradle-to-Grave |
| LCIA Method and Version: | CML-IA and TRACI 2.1 |
| Independent critical review of the LCA and data, according to ISO 14044 and ISO 14071 | <input type="checkbox"/> internal <input checked="" type="checkbox"/> external |
| LCA Reviewer: |  Thomas Gloria, Ph.D., Industrial Ecology Consultants |
| Product Category Rule: | ISO 21930:2017. Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services. |
| PCR Review conducted by: | ISO Technical Committee |
| Independent verification of the declaration and data, according to ISO 14025 and the PCR | <input type="checkbox"/> internal <input checked="" type="checkbox"/> external |
| EPD Verifier: |  Thomas Gloria, Ph.D., Industrial Ecology Consultants |
| Declaration Contents: | 1. Aeroflex USA.....2 2. Product.....2 3. LCA: Calculation Rules.....5 4. LCA: Scenarios and Additional Technical Information.....10 5. LCA: Results.....12 6. LCA: Interpretation.....22 7. Additional Environmental Information.....24 8. References.....25 |
| <p>Disclaimers: This EPD conforms to ISO 14025, 14040, 14044, and ISO 21930.</p> <p>Scope of Results Reported: The PCR requirements limit the scope of the LCA metrics such that the results exclude environmental and social performance benchmarks and thresholds, and exclude impacts from the depletion of natural resources, land use ecological impacts, ocean impacts related to greenhouse gas emissions, risks from hazardous wastes and impacts linked to hazardous chemical emissions.</p> <p>Accuracy of Results: Due to PCR constraints, this EPD provides estimations of potential impacts that are inherently limited in terms of accuracy.</p> <p>Comparability: The PCR this EPD was based on was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results, due to and not limited to, the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled.</p> <p>In accordance with ISO 21930:2017, EPDs are comparable only if they comply with the core PCR, use the same sub-category PCR where applicable, include all relevant information modules and are based on equivalent scenarios with respect to the context of construction works.</p> | |

1. Aeroflex USA

Aeroflex USA manufactures the Aerocel® brand of EPDM (ethylene propylene diene monomer) elastomeric closed cell insulation for HVAC piping, ductwork & equipment, refrigeration and plumbing systems.

We source materials that minimize hazards to the environment and human health. Most of our products are manufactured in the U.S.A. utilizing an energy-efficient production process that yields minimal waste and contributes to favorable energy optimization, indoor environmental quality and building mechanical system life cycle costs.

2. Product


The Aeroflex products included in the EPD scope are summarized below.

Aeroflex® Cel-Link II®



Aeroflex® Cel-Link II® is a thin flexible disk with a double-sided pressure-sensitive acrylic adhesive designed to adhere adjoining Aerocel® Stay-Seal® with Protape® (SSPT™) pipe insulation tubes. Cel-Link II® is a labor-saving and low-VOC alternative to field-applied liquid contact adhesives. Outside adjoining seams are sealed with Protape® as a double-closure system ensuring a zero-perm vapor barrier. Owner benefits of Cel-Link II® include higher quality outcomes, reduced installation costs and is GREENGUARD Gold Certified for low chemical emissions.

Aerocel® Protape®

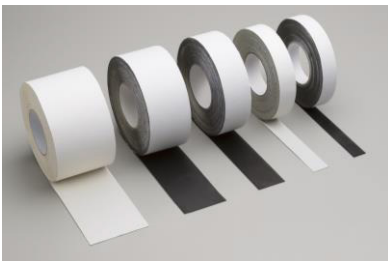

Aerocel® Protape® is an EPDM-based, self-adhering rubber tape designed to adhere and seal adjoining Aerocel® pipe, equipment and duct insulation tubes, sheets or rolls. Aerocel® Protape® offers a tenacious acrylic pressure-sensitive adhesive, passes ASTM E84 25/50, is GREENGUARD Gold Certified for low chemical emissions, flexible, handles service temperatures ranging from -70°F to +257°F (-57°C to 125 °C), is naturally UV-resistant, available in black & white and roll widths from 1" to 5" (25.4 mm to 127 mm).

Aerocel® AeroSeal LVOC™ Black



Aerocel® AEROSEAL LVOC™ Black (Low-VOC) adhesive is a synthetic rubber-based contact adhesive formulated for bonding Aerocel® EPDM insulation firmly together as well as bonding Aerocel® EPDM insulation to other substrates. AEROSEAL™ LVOC Black adhesive offers high water vapor and weather resistance to prevent moisture from penetrating joints forming a permanent bond to the applied surface. AEROSEAL LVOC™ Black adhesive has been tested according to California Department of Public Health (CDPH) Standard Method v1.2 2017 to meet the VOC emissions criteria of LEED® EQ Credit: Low-Emitting Materials for wet applied adhesives and SCAQMD Rule 1168.

Aerocel® Aerocoat™



Aerocel® Aerocoat™ is a pure acrylic emulsion water-based white latex paint especially formulated as a protective or decorative coating with Aerocel® insulation products. Aerocoat™ offers an extra level of protection for installations exposed to harsh environments such as high UV and extreme weather. Aerocoat™ has elongation properties of over 400% which promotes superior adhesion when expansion & contraction is a factor.

2.2 Application

The Aeroflex rubber insulation products provide the primary function of thermal insulation for commercial applications.

2.3 Technical Data

Technical specifications of the products included in the LCA scope, as well as product performance testing results are available on the manufacturer's website ([https:// www.aeroflexusa.com/](https://www.aeroflexusa.com/)) and summarized below.

Table 1. Technical specifications for the Aerocel® Aeroseal LVOC™ Black product.

| Property | Value |
|---------------------------|--|
| VOC Content | 167 g/L (1.39 lb./gal) |
| Solid Content | Approximately 26% by weight |
| Net weight | 839 g/L (7 lb./gal) |
| Service temperature range | -20°F to 257°F (-29°C to 125°C) (piping), 200°F (93°C) (sheets & rolls) |
| Coverage | Up to 200 ft ² /gal (4.91 m ² /L) |
| Tack time | 3-5 minutes [75°F (24°C), 70% RH] |
| Shelf life | 1 year (store at room temperature, avoid freezing) |

Table 2. Technical specifications for the Aerocel® Aerocoat™ product.

| Property | Value |
|-------------------|---|
| VOC Content | 116.2 g/L (0.97 lb./gal) |
| Solid content | Approximately 50% by weight |
| Net Weight | 1,119 g/L (10 lb./gal) |
| Coverage | Up to 400 ft ² /gal (9.82 m ² /L) |
| Shelf life | 1 year (store at room temperature, avoid freezing) |
| Drying time | 1-3 hours [75°F (24°C), 70% RH] |
| Fungus Resistance | Excellent |
| UV resistance | Excellent |

Table 3. Technical specifications for the Aeroflex® Cel-Link II® product.

| Property | Value |
|--|---|
| Thickness (without liner) | 0.04 mm - 0.06 mm (0.0016 in - 0.0024 in) |
| Service temperature range | -22°F to 248°F (-30°C to 120°C) |
| Condensation water resistance | high |
| Aging resistance | high |
| Plasticizer resistance | high |
| Tack | high |
| Peel Adhesion (test after 24 h at 73°F, Steel substrate) | 24 N/mm |
| Static Shear (test after at 73°F) | 1000 g/5mm |

Table 4. Technical specifications for the Aerocel® Protape® product.

| Property | Test Method | Test Results |
|--|---------------|---------------------------------|
| Service temperature range | ASTM C411 | -70°F to 257°F (-57°C to 125°C) |
| UV resistance | ASTM G7 | Minimal color change |
| Ozone resistance | ASTM D1171 | No cracking |
| Water vapor Permeability, Max | ASTM E96 | 0.00 perm-in |
| Fire Safety Characteristics | UL 94 | Class V-O |
| | ASTM E84 | 25/50 |
| Tensile Strength (psi) at 2" per min | JIS K6301 | 300 |
| Adhesion peel strength (lbf/in), Min at 4" per min | ASTM D3330-04 | 2.64 |
| Elongation, Min | JIS K6301 | 50% |

2.4 Base Materials

The products assessed include sheet and rolls, tubing and insulation accessory products manufactured primarily from EPDM rubber. Packaging materials consist of corrugated board and plastic wrap.

Table 5. Material component summary for the Aeroflex accessory products by mass and as a percentage of total mass.

| Product | Units | Material | | | | Packaging | | |
|-------------------------------|-------------------|----------|-----------------------|-----------------------|---------------|-----------------------|-----------------------|-----------------------|
| | | Rubber | Plastics | Other | Total Product | Paperboard | Plastic | Total Packaging |
| Aeroflex® Cel-Link II® | kg/m ² | 0.00 | 5.86x10 ⁻² | 5.00x10 ⁻² | 0.109 | 3.70x10 ⁻³ | 0.00 | 3.70x10 ⁻³ |
| | % | 0% | 54% | 46% | 100% | 100% | 0% | 100% |
| Aerocel® Protape® | kg/m ² | 0.263 | 7.84x10 ⁻² | 0.928 | 1.27 | 0.225 | 0.178 | 0.404 |
| | % | 21% | 6.2% | 73% | 100% | 56% | 44% | 100% |
| Aerocel® Aeroseal LVOC™ Black | kg/L | 0.111 | 0.111 | 0.617 | 0.839 | 5.61x10 ⁻² | 0.00 | 5.61x10 ⁻² |
| | % | 13% | 13% | 74% | 100% | 100% | 0% | 100% |
| Aerocel® Aerocoat™ | kg/L | 0.00 | 0.360 | 0.840 | 1.20 | 4.72x10 ⁻² | 6.60x10 ⁻² | 0.113 |
| | % | 0% | 30% | 70% | 100% | 42% | 58% | 100% |

2.5 Manufacture

The Aeroflex insulation products are manufactured at the company's production facilities in the United States and Thailand. Resource use at the production facilities is allocated to the products based on mass.

2.6 Environment and Health during Manufacture

No environmental or health impacts are expected during the manufacture of the product.

2.7 Product Processing/Installation

Typical installation is accomplished using hand tools.

2.8 Packaging

The products are packaged for shipment using corrugated board and plastic wrap.

2.9 Condition of Use

No special conditions of use are noted.

2.10 Environment and Health during use

No environmental or health impacts are expected due to normal use of the roof boards.

2.11 Reference Service Life

The Reference Service Life (RSL) of the products is based on the manufacturer's estimated lifetime of 25 years. The building Estimated Service Life (ESL) is 75 years, consistent with the PCR.

2.12 Extraordinary Effects

No environmental or health impacts are expected due to extraordinary effects including fire and/or water damage and unforeseeable mechanical destruction.

2.13 Further Information

Further information on the product can be found on the manufacturers' website at [https:// www.aeroflexusa.com/](https://www.aeroflexusa.com/).

3. LCA: Calculation Rules

3.1 Functional Unit

The functional units used for each product in the study, as specified in the PCR, are summarized in Table 6. The corresponding reference flow and number of product replacements required over the 75 year Estimated Service Life for each product system is also presented.

Table 6. Functional unit, Reference Service Life (RSL) and reference flows for Aeroflex's rubber insulation and accessory products.

| Product Name | Functional Unit | Reference Flow | Units | Reference Service Life – RSL (years) | Replacement Cycle (ESL/RSL-1) |
|-------------------------------|---|----------------|-------------------|--------------------------------------|-------------------------------|
| Aeroflex® Cel-Link II® | 1 m ² of product installed for use over 75 years | 0.109 | kg/m ² | 25 | 2 |
| Aerocel® Protape® | 1 m ² of product installed for use over 75 years | 1.27 | kg/m ² | 25 | 2 |
| Aerocel® Aeroseal LVOC™ Black | 1 L of product for use over 75 years | 0.839 | kg/L | 25 | 2 |
| Aerocel® Aerocoat™ | 1 L of product for use over 75 years | 1.20 | kg/L | 25 | 2 |

3.2 System Boundary

The scope of the EPD is cradle-to-grave, including raw material extraction and processing, transportation, product manufacture, product delivery, installation and use, and product disposal. The life cycle phases included in the EPD scope are described in Table 7 and illustrated in Figure 1.

Table 7. The modules and unit processes included in the scope for the Aeroflex products.

| Module | Module Description | Unit Processes Included in Scope |
|--------|---|--|
| A1 | Extraction and processing of raw materials; any reuse of products or materials from previous product systems; processing of secondary materials; generation of electricity from primary energy resources; energy, or other, recovery processes from secondary fuels | Extraction and processing of raw materials for the rubber insulation product components. |
| A2 | Transport (to the manufacturer) | Transport of component materials to the manufacturing facilities |
| A3 | Manufacturing, including ancillary material production | Manufacturing of products and packaging (incl. upstream unit processes) |
| A4 | Transport (to the building site) | Transport of product (including packaging) to the building site |
| A5 | Construction-installation process | Impacts from the installation of product are assumed negligible. Only impacts from packaging disposal are included in this phase |
| B1 | Product use | Use of the products in a commercial building setting. There are no associated emissions or impacts from the use of the product |
| B2 | Product maintenance | No routine maintenance of the products is required once installed. |
| B3 | Product repair | The products are not expected to require repair over their lifetime |
| B4 | Product replacement | The materials and energy required for replacement of the product over the 75-year ESL of the assessment are included in this phase |
| B5 | Product refurbishment | The products are not expected to require refurbishment over their lifetime |
| B6 | Operational energy use by technical building systems | There is no operational energy use associated with the use of the product |
| B7 | Operational water uses by technical building systems | There is no operational water use associated with the use of the product |
| C1 | Deconstruction, demolition | Demolition of the product is accomplished using hand tools with no associated emissions and negligible impacts |
| C2 | Transport (to waste processing) | Transport of insulation products to waste treatment at end-of-life |
| C3 | Waste processing for reuse, recovery and/or recycling | The products are disposed of by recycling, landfilling or incineration which require no waste processing |
| C4 | Disposal | Disposal of product |
| D | Reuse-recovery-recycling potential | Module Not Declared |

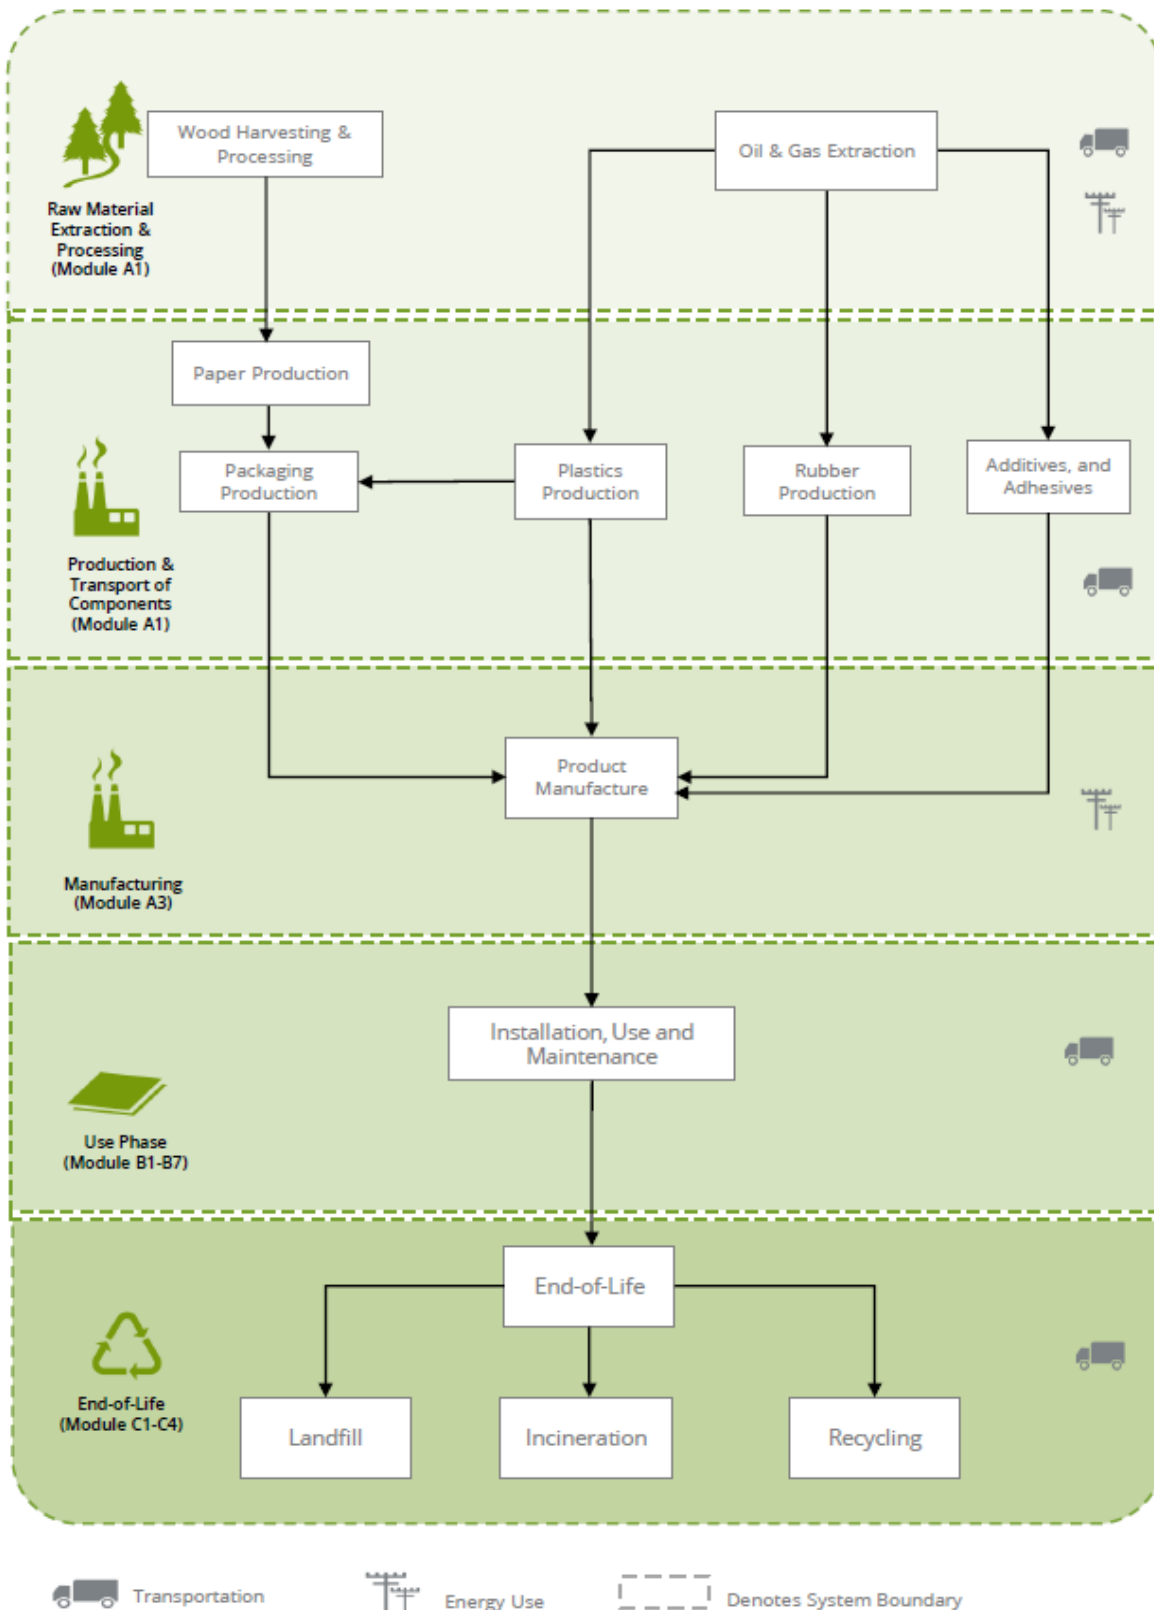


Figure 1. Flow diagram representing the major unit operations in the life cycle of the Aeroflex products.

3.3 Estimates and Assumptions

- Energy resource use and emissions at the Aeroflex manufacturing facilities were reported separately for electricity and fuel consumption (natural gas, propane). Resource use and emissions were allocated to the insulation products based on the product mass as a fraction of the total facility production.
- Electricity use at the manufacturing facilities is modeled using Ecoinvent inventory datasets modified to reflect the eGRID energy mix for the relevant NERC sub-region to estimate resource use and emissions. Ecoinvent datasets for the regional electricity grids are used to model resource use at the manufacturing facilities in Thailand and Germany.
- The Reference Service Life (RSL) of the products was modeled based on information provided by the manufacturer assuming their products are installed as recommended and used for the specific application noted.
- Lacking detailed supplier information, much of the upstream raw materials extraction and processing could not be modeled with actual process information. Representative data from the Ecoinvent LCI databases were utilized as appropriate.
- Downstream transport was modeled based on information provided by the manufacturer representing product distribution in North America.
- Specific data to estimate the recycling rates of product materials and packaging data were unavailable. Recycling rates for the product and packaging materials were based on the PCR requirements.
- Disposal of product and packaging is modeled based on regional statistics regarding municipal solid waste generation and disposal in the United States. The data include end-of-life recycling rates of product and packaging materials.
- For final disposal of the product and packaging material at end-of-life, all materials are assumed to be transported 20 miles (~32 km) by diesel truck to either a landfill, incineration facility, or material reclamation facility (for recycling). Datasets representing disposal in a landfill and waste incineration are from Ecoinvent.

It should also be noted that LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

The PCR allows for the results for several inventory flows related to construction products to be reported as “other parameters”. These are aggregated inventory flows, and do not characterize any potential impact; results should be interpreted considering this limitation.

3.4 Cut-off criteria

According to the PCR, processes contributing greater than 1% of the total environmental impact indicator for each impact are included in the inventory. No data gaps were allowed which were expected to significantly affect the outcome of the indicator results. No known flows are deliberately excluded from this EPD.

3.5 Background Data

Primary data were provided by Aeroflex USA for their manufacturing facilities. The sources of secondary LCI data are the Ecoinvent database.

Table 8. Data sources for the Aeroflex product system.

| Component | Dataset | Data Source | Publication data |
|------------------------------|---|-------------------|------------------|
| PRODUCT | | | |
| Rubber | | | |
| EPDM Compound | market for synthetic rubber synthetic rubber Cutoff/GLO | EI v3.6 | 2019 |
| Aerotape | market for acrylic binder, without water, in 34% solution state acrylic binder, without water, in 34% solution state Cutoff/RoW; market for synthetic rubber synthetic rubber Cutoff/GLO | EI v3.6 | 2019 |
| Masterbatch | | | |
| EPDM | market for synthetic rubber synthetic rubber Cutoff/GLO | EI v3.6 | 2019 |
| Flame retardant and Filler | Confidential | EI v3.6 | 2019 |
| Flame retardant and Filler | Confidential | EI v3.6 | 2019 |
| Flame retardant and Filler | Confidential | EI v3.6 | 2019 |
| Plastics | | | |
| Saniguard | market for polyvinylchloride, bulk polymerised polyvinylchloride, bulk polymerised Cutoff/GLO | EI v3.6 | 2019 |
| Polyester scrim | market for polyethylene terephthalate, granulate, amorphous polyethylene terephthalate, granulate, amorphous Cutoff/GLO | EI v3.6 | 2019 |
| Acrylic Polymer | acrylic filler production acrylic filler Cutoff/RoW | EI v3.6 | 2019 |
| Other | | | |
| Propylene Glycol | propylene glycol production, liquid propylene glycol, liquid Cutoff/RoW | EI v3.6 | 2019 |
| Titanium Oxide | market for titanium dioxide titanium dioxide Cutoff/RoW | EI v3.6 | 2019 |
| Aqua Ammonia | market for ammonia, liquid ammonia, liquid Cutoff/RoW | EI v3.6 | 2019 |
| Organic chemicals | market for chemical, organic chemical, organic Cutoff/GLO | EI v3.6 | 2019 |
| Paper liner, Silicone-coated | market for kraft paper, unbleached kraft paper, unbleached Cutoff/GLO | EI v3.6 | 2019 |
| Water | market group for tap water tap water Cutoff/GLO | EI v3.6 | 2019 |
| PACKAGING | | | |
| Paperboard carton | market for corrugated board box corrugated board box Cutoff/RoW | EI v3.6 | 2019 |
| Polypropylene can | market for polypropylene, granulate polypropylene, granulate Cutoff/GLO | EI v3.6 | 2019 |
| Plastic wrap | market for packaging film, low density polyethylene packaging film, low density polyethylene Cutoff/GLO | EI v3.6 | 2019 |
| TRANSPORT | | | |
| Diesel truck | market for transport, freight, lorry 16-32 metric ton, EURO4 transport, freight, lorry 16-32 metric ton, EURO4 Cutoff/RoW | EI v3.6 | 2019 |
| Ocean freighter | transport, freight, sea, container ship transport, freight, sea, container ship Cutoff, S/GLO | EI v3.6 | 2019 |
| RESOURCES | | | |
| Grid electricity | Electricity, medium voltage, per kWh - SRTV/SRTV | EI v3.6; eGRID | 2019; 2018 |
| | Electricity, medium voltage, per kWh - RFCE/RFCE | EI v3.6; eGRID | 2019; 2018 |
| | market for electricity, medium voltage electricity, medium voltage Cutoff/TH | EI v3.6 | 2019 |
| | market for electricity, medium voltage electricity, medium voltage Cutoff/DE | EI v3.6 | 2019 |
| Heat - natural gas | market group for heat, district or industrial, natural gas heat, district or industrial, natural gas Cutoff/GLO | EI v3.6 | 2019 |
| Heat - propane | heat production, propane, at industrial furnace >100kW heat, district or industrial, other than natural gas Cutoff/RoW | EI v3.6 | 2019 |

3.6 Data Quality

The data quality assessment addressed the following parameters: time-related coverage, geographical coverage, technological coverage, precision, completeness, representativeness, consistency, reproducibility, sources of data, and uncertainty.

Table 9. Data quality assessment for the Aeroflex product system.

| Data Quality Parameter | Data Quality Discussion |
|---|--|
| Time-Related Coverage: Age of data and the minimum length of time over which data is collected | The most recent available data are used, based on other considerations such as data quality and similarity to the actual operations. Typically, these data are less than 5 years old (typically 2016). All of the data used represented an average of at least one year's worth of data collection, and up to three years in some cases. Manufacturer-supplied data (primary data) are based on production data for 2019 and 2020 |
| Geographical Coverage: Geographical area from which data for unit processes is collected to satisfy the goal of the study | The data used in the analysis provide the best possible representation available with current data. Electricity use for product manufacture is modeled using representative data for the US, Thailand and Germany, as appropriate. Surrogate data used in the assessment are representative of global or European operations. Data representative of European operations are considered sufficiently similar to actual processes. Data representing product disposal are based on US statistics. |
| Technology Coverage: Specific technology or technology mix | For the most part, data are representative of the actual technologies used for processing, transportation, and manufacturing operations. Representative fabrication datasets, specific to the type of material, are used to represent the actual processes, as appropriate. |
| Precision: Measure of the variability of the data values for each data expressed | Precision of results are not quantified due to a lack of data. Data collected for operations were typically averaged for one or more years and over multiple operations, which is expected to reduce the variability of results. |
| Completeness: Percentage of flow that is measured or estimated | The LCA model included all known mass and energy flows for production of the insulation products. In some instances, surrogate data used to represent upstream and downstream operations may be missing some data which is propagated in the model. No known processes or activities contributing to more than 1% of the total environmental impact for each indicator are excluded. |
| Representativeness: Qualitative assessment of the degree to which the data set reflects the true population of interest | Data used in the assessment represent typical or average processes as currently reported from multiple data sources and are therefore generally representative of the range of actual processes and technologies for production of these materials. Considerable deviation may exist among actual processes on a site-specific basis; however, such a determination would require detailed data collection throughout the supply chain back to resource extraction. |
| Consistency: Qualitative assessment of whether the study methodology is applied uniformly to the various components of the analysis | The consistency of the assessment is considered to be high. Data sources of similar quality and age are used; with a bias towards Ecoinvent v3.6 data where available. Different portions of the product life cycle are equally considered; however, it must be noted that final disposition of the product is based on assumptions of current average practices in the United States. |
| Reproducibility: Qualitative assessment of the extent to which information about the methodology and data values would allow an independent practitioner to reproduce the results reported in the study | Based on the description of data and assumptions used, this assessment would be reproducible by other practitioners. All assumptions, models, and data sources are documented. |
| Sources of the Data: Description of all primary and secondary data sources | Data representing energy use at Aeroflex's manufacturing facilities represent an annual average and are considered of high quality due to the length of time over which these data are collected, as compared to a snapshot that may not accurately reflect fluctuations in production. For secondary LCI data, Ecoinvent v3.6 LCI data are used. |
| Uncertainty of the Information: Uncertainty related to data, models, and assumptions | Uncertainty related to materials in the insulation products and packaging is low. Actual supplier data for upstream operations was not available for all suppliers and the study relied upon the use of existing representative datasets. These datasets contained relatively recent data (<10 years) but lacked geographical representativeness. Uncertainty related to the impact assessment methods used in the study are high. The impact assessment method required by the PCR includes impact potentials, which lack characterization of providing and receiving environments or tipping points. |

3.7 Period under review

The period of review represents production data for 2019 and 2020.

3.8 Allocation

Manufacturing resource use was allocated to the products based on mass. Impacts from transportation were allocated based on the mass of material and distance transported.

3.9 Comparability

The PCR this EPD was based on was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results, due to and not limited to, the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled.

4. LCA: Scenarios and Additional Technical Information

Delivery and Installation stage (A4 - A5)

Distribution of the insulation products to the point of installation is included in the assessment. Transportation parameters for modeling product distribution are summarized in Table 10. Average distances by transport mode were used to represent distribution to the North American consumer market.

Table 10. Distribution modeling parameters by product and transport mode per declared unit.

| Transport Mode | Fuel utilization | Capacity utilization (%) |
|-------------------------------|--|--------------------------|
| Diesel truck | 42 L/100 km | 76% |
| Product | Gross mass transported ¹ (kg) | Transport Distance (km) |
| Aeroflex® Cel-Link II® | 0.112 | 1,954 |
| Aerocel® Protape® | 1.67 | 1,954 |
| Aerocel® Aeroseal LVOC™ Black | 0.895 | 1,954 |
| Aerocel® Aerocoat™ | 1.31 | 1,954 |

¹ Including packaging

The impacts associated with the product installation are assumed negligible. The impacts associated with packaging disposal are included with the installation phase as per PCR requirements.

Table 11. Installation parameters for the Aeroflex products, per declared unit.

| Parameter | Value | | |
|---|------------------------------|-----------------------|--|
| Ancillary materials (kg) | negligible | | |
| Net freshwater consumption (m ³) | - | | |
| Electricity consumption (kWh) | - | | |
| Product loss per functional unit (kg) | negligible | | |
| Waste materials generated by product installation (kg) | negligible | | |
| Output materials resulting from on-site waste processing (kg) | na | | |
| Direct emissions (kg) | - | | |
| Product | Mass of packaging waste (kg) | | Biogenic carbon contained in packaging (kg CO ₂) |
| | Corrugated | Plastic | |
| Aeroflex® Cel-Link II® | 3.70x10 ⁻³ | 0.00 | 6.51x10 ⁻³ |
| Aerocel® Protape® | 0.225 | 0.178 | 0.397 |
| Aerocel® Aeroseal LVOC™ Black | 5.61x10 ⁻² | 0.00 | 9.88x10 ⁻² |
| Aerocel® Aerocoat™ | 4.72x10 ⁻² | 6.60x10 ⁻² | 8.31x10 ⁻² |

Use stage (B1)

There are no direct impacts from the use of the products.

Maintenance stage (B2)

The products require no maintenance once installed and impacts for this life cycle stage are reported as zero.

Repair/Refurbishment stage (B3; B5)

Product repair and refurbishment are not relevant during the lifetime of the product.

Replacement stage (B4)

The materials and energy required for replacement of the product over the 75-year ESL of the assessment are included in this stage.

Building operation stage (B6 – B7)

There is no operational energy or water use associated with the use of the product.

Disposal stage (C1 - C4)

The disposal stage includes removal of the products (C1); transport of the products to waste treatment facilities (C2); waste processing (C3); and associated emissions as the product degrades in a landfill or is burned in an incinerator (C4). For the movable wall system products, no emissions are generated during demolition (C1) while no waste processing (C3) is required for incineration or landfill disposal.

Transportation of waste materials at end-of-life (C2) assumes a 20 mile (~32 km) average distance to disposal, consistent with assumptions used in the US EPA WARM model. The recycling rates used for the product packaging are based on regional statistics regarding municipal solid waste generation and disposal in the United States for 2015, from the US Environmental Protection Agency. The relevant disposal statistics used for the product and packaging are summarized in Table 12 and Table 13. For material not recycled, 80% are assumed landfilled and 20% incinerated.

Table 12. Recycling rates for packaging materials at end-of-life.

| Material | Product | Packaging |
|------------------------------------|---------|-----------|
| Recycling Rates | | |
| Rubber | 20.5% | n/a |
| Plastics | 6.6% | 15% |
| Paper & Pulp | n/a | 75% |
| Disposal of Non-recyclables | | |
| Landfill | 80% | 80% |
| Incineration | 20% | 20% |

Table 13. End-of-life disposal scenario parameters for the Aeroflex insulation products.

| Product | Scenario assumptions | Collection process | | Recovery | Disposal | | | Removals of biogenic carbon (Excludes Packaging) |
|-------------------------------|----------------------|----------------------|----------------------------|----------|-----------------------|-----------------------|-----------------------|--|
| | | Collected separately | Collected with mixed waste | | Recycling | Landfill | Incineration | |
| Aeroflex® Cel-Link II® | EPA 2015 | - | 0.109 | n/a | 3.87x10 ⁻³ | 8.38x10 ⁻² | 2.09x10 ⁻² | n/a |
| Aerocel® Protape® | EPA 2015 | - | 1.27 | n/a | 8.49x10 ⁻² | 0.948 | 0.237 | n/a |
| Aerocel® Aeroseal LVOC™ Black | EPA 2015 | - | 0.839 | n/a | 3.01x10 ⁻² | 0.647 | 0.162 | n/a |
| Aerocel® Aerocoat™ | EPA 2015 | - | 1.20 | n/a | 2.38x10 ⁻² | 0.941 | 0.235 | n/a |

5. LCA: Results

Results of the Life Cycle Assessment are presented below. It is noted that LCA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

Table 14. Life cycle phases included in the product system boundary.

| Product | | | Construction Process | | Use | | | | | | | End-of-life | | | | Benefits and loads beyond the system boundary |
|--|---------------------------|---------------|----------------------|-----------------------------|-----|-------------|--------|-------------|---------------|------------------------|-----------------------|---------------------------|-----------|------------------|----------|---|
| A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
| Raw material extraction and processing | Transport to manufacturer | Manufacturing | Transport | Construction - installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | Deconstruction demolition | Transport | Waste processing | Disposal | Reuse, recovery and/or recycling potential |
| X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | MND |

X = Included in system boundary | MND = Module not declared

The following impact indicators, specified by the PCR, are reported below:

| CML-IA Impact Category | Unit | TRACI 2.1 Impact Category | Unit |
|---|-------------------------------------|--|-----------------------|
| Global Warming Potential (GWP) | kg CO ₂ eq | Global Warming Potential (GWP) | kg CO ₂ eq |
| Depletion potential of the stratospheric ozone layer (ODP) | kg CFC 11 eq | Ozone Depletion Potential (ODP) | kg CFC 11 eq |
| Acidification Potential of soil and water (AP) | kg SO ₂ eq | Acidification Potential (AP) | kg SO ₂ eq |
| Eutrophication Potential (EP) | kg PO ₄ ³⁻ eq | Eutrophication Potential (EP) | kg N eq |
| Photochemical Oxidant Creation Potential (POCP) | kg C ₂ H ₄ eq | Smog Formation Potential (SFP) | kg O ₃ eq |
| Abiotic depletion potential (ADP-elements) for non-fossil resources | kg Sb eq | Fossil Fuel Depletion Potential (ADP _{fossil}) | MJ Surplus, LHV |
| Abiotic depletion potential (ADP-fossil fuels) for fossil resources | MJ, LHV | - | - |

The following inventory parameters, specified by the PCR, are also reported.

| Resources | Unit | Waste and Outflows | Unit |
|--|----------------|--|---------|
| RPR _E : Renewable primary resources used as energy carrier (fuel) | MJ, LHV | HWD: Hazardous waste disposed | kg |
| RPR _M : Renewable primary resources with energy content used as material | MJ, LHV | NHWD: Non-hazardous waste disposed | kg |
| NRPR _E : Non-renewable primary resources used as an energy carrier (fuel) | MJ, LHV | HLRW: High-level radioactive waste, conditioned, to final repository | kg |
| NRPR _M : Non-renewable primary resources with energy content used as material | MJ, LHV | ILLRW: Intermediate- and low-level radioactive waste, conditioned, to final repository | kg |
| SM: Secondary materials | MJ, LHV | CRU: Components for re-use | kg |
| RSF: Renewable secondary fuels | MJ, LHV | MR: Materials for recycling | kg |
| NRSF: Non-renewable secondary fuels | MJ, LHV | MER: Materials for energy recovery | kg |
| RE: Recovered energy | MJ, LHV | EE: Recovered energy exported from the product system | MJ, LHV |
| FW: Use of net freshwater resources | m ³ | - | - |

Modules B1, B2, B3, B5, B6 and B7 are not associated with any impact and are therefore declared as zero. In addition, module C1 and C3 are likewise not associated with any impact as the products are expected to be manually deconstructed. Additionally, as the products do not contain bio-based materials, biogenic carbon emissions and removals are not declared. Module D is not declared. In the interest of space and table readability, these modules are not included in the results presented below.

Table 15. Life Cycle Impact Assessment (LCIA) results for the Aeroflex® Cel-Link II® products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

| Impact Category | A1 | A2 | A3 | A4 | A5 | B4 | C2 | C4 |
|---|-----------------------|------------------------|------------------------|------------------------|------------------------|-----------------------|------------------------|------------------------|
| CML-IA | | | | | | | | |
| GWP (kg CO ₂ eq) | 0.301 | 6.20x10 ⁻² | 2.00x10 ⁻² | 3.75x10 ⁻² | 1.29x10 ⁻³ | 0.977 | 4.43x10 ⁻³ | 6.26x10 ⁻² |
| | 21% | 4.2% | 1.4% | 2.6% | 0.088% | 67% | 0.3% | 4.3% |
| ODP (kg CFC-11 eq) | 1.56x10 ⁻⁸ | 1.07x10 ⁻⁸ | 2.10x10 ⁻⁹ | 6.58x10 ⁻⁹ | 2.90x10 ⁻¹¹ | 7.22x10 ⁻⁸ | 7.72x10 ⁻¹⁰ | 2.87x10 ⁻¹⁰ |
| | 14% | 9.9% | 1.9% | 6.1% | 0.027% | 67% | 0.71% | 0.26% |
| AP (kg SO ₂ eq) | 1.48x10 ⁻³ | 4.77x10 ⁻⁴ | 4.18x10 ⁻⁵ | 1.47x10 ⁻⁴ | 9.02x10 ⁻⁷ | 4.37x10 ⁻³ | 2.07x10 ⁻⁵ | 1.37x10 ⁻⁵ |
| | 23% | 7.3% | 0.64% | 2.2% | 0.014% | 67% | 0.32% | 0.21% |
| EP (kg (PO ₄) ³⁻ eq) | 4.38x10 ⁻⁴ | 7.88x10 ⁻⁵ | 1.43x10 ⁻⁵ | 3.50x10 ⁻⁵ | 2.17x10 ⁻⁶ | 1.75x10 ⁻³ | 4.47x10 ⁻⁶ | 3.01x10 ⁻⁴ |
| | 17% | 3% | 0.55% | 1.3% | 0.083% | 67% | 0.17% | 11% |
| POCP (kg C ₂ H ₄ eq) | 1.19x10 ⁻⁴ | 1.42x10 ⁻⁵ | 2.74x10 ⁻⁶ | 5.11x10 ⁻⁶ | 2.71x10 ⁻⁷ | 2.97x10 ⁻⁴ | 6.86x10 ⁻⁷ | 6.33x10 ⁻⁶ |
| | 27% | 3.2% | 0.62% | 1.1% | 0.061% | 67% | 0.15% | 1.4% |
| ADPE (kg Sb eq) | 1.53x10 ⁻⁹ | 5.67x10 ⁻¹¹ | 2.34x10 ⁻¹¹ | 3.85x10 ⁻¹¹ | 1.03x10 ⁻¹³ | 3.30x10 ⁻⁹ | 1.21x10 ⁻¹² | 4.09x10 ⁻¹² |
| | 31% | 1.1% | 0.47% | 0.78% | 0.0021% | 67% | 0.024% | 0.083% |
| ADPF (MJ eq) | 6.46 | 0.895 | 0.299 | 0.553 | 2.36x10 ⁻³ | 16.6 | 6.06x10 ⁻² | 2.89x10 ⁻² |
| | 26% | 3.6% | 1.2% | 2.2% | 0.0095% | 67% | 0.24% | 0.12% |
| TRACI 2.1 | | | | | | | | |
| GWP (kg CO ₂ eq) | 0.295 | 6.18x10 ⁻² | 5.24x10 ⁻² | 3.74x10 ⁻² | 1.17x10 ⁻³ | 1.02 | 4.43x10 ⁻³ | 5.94x10 ⁻² |
| | 19% | 4% | 3.4% | 2.4% | 0.076% | 67% | 0.29% | 3.9% |
| ODP (kg CFC-11 eq) | 1.97x10 ⁻⁸ | 1.43x10 ⁻⁸ | 4.28x10 ⁻⁹ | 8.75x10 ⁻⁹ | 3.86x10 ⁻¹¹ | 9.68x10 ⁻⁸ | 1.03x10 ⁻⁹ | 3.74x10 ⁻¹⁰ |
| | 14% | 9.8% | 3% | 6% | 0.027% | 67% | 0.71% | 0.26% |
| AP (kg SO ₂ eq) | 1.55x10 ⁻³ | 5.28x10 ⁻⁴ | 1.19x10 ⁻⁴ | 1.72x10 ⁻⁴ | 1.29x10 ⁻⁶ | 4.85x10 ⁻³ | 2.56x10 ⁻⁵ | 2.48x10 ⁻⁵ |
| | 21% | 7.3% | 1.6% | 2.4% | 0.018% | 67% | 0.35% | 0.34% |
| EP (kg N eq) | 8.94x10 ⁻⁴ | 7.61x10 ⁻⁵ | 3.74x10 ⁻⁴ | 4.38x10 ⁻⁵ | 5.48x10 ⁻⁶ | 4.44x10 ⁻³ | 3.36x10 ⁻⁶ | 8.23x10 ⁻⁴ |
| | 13% | 1.1% | 5.6% | 0.66% | 0.082% | 67% | 0.051% | 12% |
| SFP (kg O ₃ eq) | 1.74x10 ⁻² | 1.10x10 ⁻² | 1.60x10 ⁻³ | 4.10x10 ⁻³ | 2.87x10 ⁻⁵ | 7.06x10 ⁻² | 7.24x10 ⁻⁴ | 3.98x10 ⁻⁴ |
| | 16% | 10% | 1.5% | 3.9% | 0.027% | 67% | 0.68% | 0.38% |
| FFD (MJ eq) | 0.787 | 0.121 | 5.32x10 ⁻² | 7.44x10 ⁻² | 3.26x10 ⁻⁴ | 2.09 | 8.59x10 ⁻³ | 3.57x10 ⁻³ |
| | 25% | 3.8% | 1.7% | 2.4% | 0.01% | 67% | 0.27% | 0.11% |

Table 16. Resource use and waste flows for the Aeroflex® Cel-Link II® products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

| Parameter | A1 | A2 | A3 | A4 | A5 | B4 | C2 | C4 |
|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------|-----------------------|-----------------------|-----------------------|
| Resources | | | | | | | | |
| RPR _E (MJ) | 0.188 | 9.32x10 ⁻³ | 0.142 | 6.14x10 ⁻³ | 2.32x10 ⁻⁵ | 0.693 | 2.23x10 ⁻⁴ | 9.22x10 ⁻⁴ |
| | 18% | 0.9% | 14% | 0.59% | 0.0022% | 67% | 0.022% | 0.089% |
| RPR _M (MJ) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| NRPR _E (MJ) | INA | INA | INA | INA | INA | INA | INA | INA |
| NRPR _M (MJ) | INA | INA | INA | INA | INA | INA | INA | INA |
| SM (kg) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| RSF/NRSF (MJ) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |
| RE (MJ) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |
| FW (m ³) | 1.62x10 ⁻² | 6.03x10 ⁻⁴ | 1.53x10 ⁻³ | 4.02x10 ⁻⁴ | 1.88x10 ⁻⁶ | 3.76x10 ⁻² | 1.99x10 ⁻⁵ | 8.32x10 ⁻⁵ |
| | 29% | 1.1% | 2.7% | 0.71% | 0.0033% | 67% | 0.035% | 0.15% |
| Wastes | | | | | | | | |
| HWD (kg) | 3.74x10 ⁻⁶ | 2.16x10 ⁻⁶ | 4.57x10 ⁻⁷ | 1.48x10 ⁻⁶ | 6.03x10 ⁻⁹ | 1.62x10 ⁻⁵ | 1.65x10 ⁻⁷ | 9.94x10 ⁻⁸ |
| | 15% | 8.9% | 1.9% | 6.1% | 0.025% | 67% | 0.68% | 0.41% |
| NHWD (kg) | 6.33x10 ⁻² | 3.67x10 ⁻² | 7.77x10 ⁻⁴ | 2.65x10 ⁻² | 7.56x10 ⁻⁴ | 0.426 | 2.87x10 ⁻⁴ | 8.48x10 ⁻² |
| | 9.9% | 5.7% | 0.12% | 4.1% | 0.12% | 67% | 0.045% | 13% |
| HLRW (kg) | 8.05x10 ⁻⁷ | 4.49x10 ⁻⁸ | 3.34x10 ⁻⁸ | 3.02x10 ⁻⁸ | 1.22x10 ⁻¹⁰ | 1.84x10 ⁻⁶ | 1.02x10 ⁻⁹ | 4.95x10 ⁻⁹ |
| | 29% | 1.6% | 1.2% | 1.1% | 0.0044% | 67% | 0.037% | 0.18% |
| ILLRW (kg) | 6.72x10 ⁻⁶ | 5.96x10 ⁻⁶ | 2.91x10 ⁻⁷ | 3.66x10 ⁻⁶ | 1.61x10 ⁻⁸ | 3.44x10 ⁻⁵ | 4.31x10 ⁻⁷ | 1.46x10 ⁻⁷ |
| | 13% | 12% | 0.56% | 7.1% | 0.031% | 67% | 0.83% | 0.28% |
| CRU (kg) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| MR (kg) | 0.00 | 0.00 | 0.00 | 0.00 | 2.78x10 ⁻³ | 1.33x10 ⁻² | 0.00 | 3.87x10 ⁻³ |
| | 0% | 0% | 0% | 0% | 14% | 67% | 0% | 19% |
| MER (kg) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |
| EE (MJ) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |

INA = Indicator not assessed | Neg. = Negligible

Table 17. Life Cycle Impact Assessment (LCIA) results for the Aerocel® Protape® products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

| Impact Category | A1 | A2 | A3 | A4 | A5 | B4 | C2 | C4 |
|---|-----------------------|------------------------|-----------------------|------------------------|------------------------|-----------------------|------------------------|------------------------|
| CML-IA | | | | | | | | |
| GWP (kg CO ₂ eq) | 2.18 | 0.466 | 1.84 | 0.558 | 8.60x10 ⁻² | 12.0 | 5.18x10 ⁻² | 0.828 |
| | 12% | 2.6% | 10% | 3.1% | 0.48% | 67% | 0.29% | 4.6% |
| ODP (kg CFC-11 eq) | 4.47x10 ⁻⁷ | 7.81x10 ⁻⁸ | 8.82x10 ⁻⁸ | 9.80x10 ⁻⁸ | 3.04x10 ⁻⁹ | 1.45x10 ⁻⁶ | 9.03x10 ⁻⁹ | 3.66x10 ⁻⁹ |
| | 20% | 3.6% | 4% | 4.5% | 0.14% | 67% | 0.41% | 0.17% |
| AP (kg SO ₂ eq) | 1.32x10 ⁻² | 7.37x10 ⁻³ | 6.87x10 ⁻³ | 2.19x10 ⁻³ | 8.90x10 ⁻⁵ | 6.03x10 ⁻² | 2.42x10 ⁻⁴ | 1.94x10 ⁻⁴ |
| | 15% | 8.1% | 7.6% | 2.4% | 0.098% | 67% | 0.27% | 0.21% |
| EP (kg (PO ₄) ³⁻ eq) | 3.57x10 ⁻³ | 9.32x10 ⁻⁴ | 3.58x10 ⁻³ | 5.21x10 ⁻⁴ | 1.40x10 ⁻⁴ | 2.28x10 ⁻² | 5.22x10 ⁻⁵ | 2.59x10 ⁻³ |
| | 10% | 2.7% | 10% | 1.5% | 0.41% | 67% | 0.15% | 7.6% |
| POCP (kg C ₂ H ₄ eq) | 6.41x10 ⁻⁴ | 1.99x10 ⁻⁴ | 4.86x10 ⁻⁴ | 7.62x10 ⁻⁵ | 1.76x10 ⁻⁵ | 3.11x10 ⁻³ | 8.02x10 ⁻⁶ | 1.25x10 ⁻⁴ |
| | 14% | 4.3% | 10% | 1.6% | 0.38% | 67% | 0.17% | 2.7% |
| ADPE (kg Sb eq) | 1.31x10 ⁻⁸ | 3.13x10 ⁻¹⁰ | 5.70x10 ⁻⁹ | 5.74x10 ⁻¹⁰ | 8.27x10 ⁻¹² | 3.96x10 ⁻⁸ | 1.42x10 ⁻¹¹ | 6.70x10 ⁻¹¹ |
| | 22% | 0.53% | 9.6% | 0.97% | 0.014% | 67% | 0.024% | 0.11% |
| ADPF (MJ eq) | 49.6 | 6.39 | 29.5 | 8.25 | 0.243 | 190 | 0.709 | 0.373 |
| | 17% | 2.2% | 10% | 2.9% | 0.085% | 67% | 0.25% | 0.13% |
| TRACI 2.1 | | | | | | | | |
| GWP (kg CO ₂ eq) | 2.16 | 0.465 | 1.81 | 0.557 | 7.87x10 ⁻² | 11.8 | 5.18x10 ⁻² | 0.767 |
| | 12% | 2.6% | 10% | 3.2% | 0.45% | 67% | 0.29% | 4.3% |
| ODP (kg CFC-11 eq) | 5.82x10 ⁻⁷ | 1.04x10 ⁻⁷ | 1.17x10 ⁻⁷ | 1.30x10 ⁻⁷ | 4.04x10 ⁻⁹ | 1.91x10 ⁻⁶ | 1.20x10 ⁻⁸ | 4.72x10 ⁻⁹ |
| | 20% | 3.6% | 4.1% | 4.6% | 0.14% | 67% | 0.42% | 0.17% |
| AP (kg SO ₂ eq) | 1.32x10 ⁻² | 7.91x10 ⁻³ | 7.39x10 ⁻³ | 2.57x10 ⁻³ | 1.21x10 ⁻⁴ | 6.37x10 ⁻² | 2.99x10 ⁻⁴ | 3.79x10 ⁻⁴ |
| | 14% | 8.3% | 7.7% | 2.7% | 0.13% | 67% | 0.31% | 0.4% |
| EP (kg N eq) | 7.31x10 ⁻³ | 6.33x10 ⁻⁴ | 7.43x10 ⁻³ | 6.52x10 ⁻⁴ | 3.39x10 ⁻⁴ | 4.65x10 ⁻² | 3.93x10 ⁻⁵ | 6.84x10 ⁻³ |
| | 10% | 0.91% | 11% | 0.93% | 0.49% | 67% | 0.056% | 9.8% |
| SFP (kg O ₃ eq) | 0.146 | 0.151 | 0.108 | 6.11x10 ⁻² | 2.94x10 ⁻³ | 0.965 | 8.47x10 ⁻³ | 4.93x10 ⁻³ |
| | 10% | 10% | 7.4% | 4.2% | 0.2% | 67% | 0.58% | 0.34% |
| FFD (MJ eq) | 6.09 | 0.875 | 3.46 | 1.11 | 3.40x10 ⁻² | 23.4 | 0.100 | 4.37x10 ⁻² |
| | 17% | 2.5% | 9.9% | 3.2% | 0.097% | 67% | 0.29% | 0.12% |

Table 18. Resource use and waste flows for the Aerocel® Protape® products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

| Parameter | A1 | A2 | A3 | A4 | A5 | B4 | C2 | C4 |
|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Resources | | | | | | | | |
| RPR _E (MJ) | 1.32 | 5.66x10 ⁻² | 2.26 | 9.15x10 ⁻² | 1.78x10 ⁻³ | 7.51 | 2.61x10 ⁻³ | 1.62x10 ⁻² |
| | 12% | 0.5% | 20% | 0.81% | 0.016% | 67% | 0.023% | 0.14% |
| RPR _M (MJ) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| NRPR _E (MJ) | INA | INA | INA | INA | INA | INA | INA | INA |
| NRPR _M (MJ) | INA | INA | INA | INA | INA | INA | INA | INA |
| SM (kg) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| RSF/NRSF (MJ) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |
| RE (MJ) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |
| FW (m ³) | 9.20x10 ⁻² | 3.55x10 ⁻³ | 0.120 | 5.99x10 ⁻³ | 1.47x10 ⁻⁴ | 0.447 | 2.33x10 ⁻⁴ | 1.49x10 ⁻³ |
| | 14% | 0.53% | 18% | 0.89% | 0.022% | 67% | 0.035% | 0.22% |
| Wastes | | | | | | | | |
| HWD (kg) | 2.61x10 ⁻⁵ | 1.15x10 ⁻⁵ | 1.77x10 ⁻⁵ | 2.20x10 ⁻⁵ | 6.38x10 ⁻⁷ | 1.63x10 ⁻⁴ | 1.93x10 ⁻⁶ | 1.34x10 ⁻⁶ |
| | 11% | 4.7% | 7.3% | 9% | 0.26% | 67% | 0.79% | 0.55% |
| NHWD (kg) | 0.830 | 0.161 | 0.286 | 0.395 | 4.66x10 ⁻² | 5.37 | 3.36x10 ⁻³ | 0.965 |
| | 10% | 2% | 3.5% | 4.9% | 0.58% | 67% | 0.042% | 12% |
| HLRW (kg) | 5.80x10 ⁻⁶ | 2.56x10 ⁻⁷ | 3.18x10 ⁻⁶ | 4.50x10 ⁻⁷ | 9.10x10 ⁻⁹ | 1.96x10 ⁻⁵ | 1.20x10 ⁻⁸ | 8.79x10 ⁻⁸ |
| | 20% | 0.87% | 11% | 1.5% | 0.031% | 67% | 0.041% | 0.3% |
| ILLRW (kg) | 2.30x10 ⁻⁴ | 4.34x10 ⁻⁵ | 2.93x10 ⁻⁵ | 5.45x10 ⁻⁵ | 1.69x10 ⁻⁶ | 7.31x10 ⁻⁴ | 5.04x10 ⁻⁶ | 1.82x10 ⁻⁶ |
| | 21% | 4% | 2.7% | 5% | 0.15% | 67% | 0.46% | 0.17% |
| CRU (kg) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| MR (kg) | 0.00 | 0.00 | 0.00 | 0.00 | 0.347 | 0.865 | 0.00 | 8.49x10 ⁻² |
| | 0% | 0% | 0% | 0% | 27% | 67% | 0% | 6.5% |
| MER (kg) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |
| EE (MJ) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |

INA = Indicator not assessed | Neg. = Negligible

Table 19. Life Cycle Impact Assessment (LCIA) results for the Aerocel® Aeroseal LVOC™ Black products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

| Impact Category | A1 | A2 | A3 | A4 | A5 | B4 | C2 | C4 |
|---|-----------------------|------------------------|-----------------------|------------------------|------------------------|-----------------------|------------------------|------------------------|
| CML-IA | | | | | | | | |
| GWP (kg CO ₂ eq) | 2.32 | 0.169 | 8.81x10 ⁻² | 0.299 | 1.96x10 ⁻² | 6.93 | 3.42x10 ⁻² | 0.533 |
| | 22% | 1.6% | 0.85% | 2.9% | 0.19% | 67% | 0.33% | 5.1% |
| ODP (kg CFC-11 eq) | 7.09x10 ⁻⁸ | 2.97x10 ⁻⁸ | 9.74x10 ⁻⁹ | 5.24x10 ⁻⁸ | 4.41x10 ⁻¹⁰ | 3.43x10 ⁻⁷ | 5.96x10 ⁻⁹ | 2.48x10 ⁻⁹ |
| | 14% | 5.8% | 1.9% | 10% | 0.086% | 67% | 1.2% | 0.48% |
| AP (kg SO ₂ eq) | 1.01x10 ⁻² | 6.64x10 ⁻⁴ | 3.14x10 ⁻⁴ | 1.17x10 ⁻³ | 1.37x10 ⁻⁵ | 2.51x10 ⁻² | 1.60x10 ⁻⁴ | 1.29x10 ⁻⁴ |
| | 27% | 1.8% | 0.83% | 3.1% | 0.036% | 67% | 0.42% | 0.34% |
| EP (kg (PO ₄) ³⁻ eq) | 2.97x10 ⁻³ | 1.58x10 ⁻⁴ | 1.36x10 ⁻⁴ | 2.79x10 ⁻⁴ | 3.30x10 ⁻⁵ | 1.10x10 ⁻² | 3.45x10 ⁻⁵ | 1.89x10 ⁻³ |
| | 18% | 0.96% | 0.83% | 1.7% | 0.2% | 67% | 0.21% | 11% |
| POCP (kg C ₂ H ₄ eq) | 2.48x10 ⁻³ | 2.31x10 ⁻⁵ | 1.65x10 ⁻⁵ | 4.07x10 ⁻⁵ | 4.11x10 ⁻⁶ | 5.30x10 ⁻³ | 5.30x10 ⁻⁶ | 7.88x10 ⁻⁵ |
| | 31% | 0.29% | 0.21% | 0.51% | 0.052% | 67% | 0.067% | 0.99% |
| ADPE (kg Sb eq) | 1.62x10 ⁻⁷ | 1.74x10 ⁻¹⁰ | 1.33x10 ⁻⁹ | 3.07x10 ⁻¹⁰ | 1.56x10 ⁻¹² | 3.28x10 ⁻⁷ | 9.36x10 ⁻¹² | 4.36x10 ⁻¹¹ |
| | 33% | 0.035% | 0.27% | 0.062% | 0.00032% | 67% | 0.0019% | 0.0089% |
| ADPF (MJ eq) | 55.9 | 2.50 | 1.20 | 4.41 | 3.58x10 ⁻² | 130 | 0.468 | 0.251 |
| | 29% | 1.3% | 0.62% | 2.3% | 0.018% | 67% | 0.24% | 0.13% |
| TRACI 2.1 | | | | | | | | |
| GWP (kg CO ₂ eq) | 2.26 | 0.169 | 8.72x10 ⁻² | 0.298 | 1.78x10 ⁻² | 6.72 | 3.42x10 ⁻² | 0.494 |
| | 22% | 1.7% | 0.87% | 3% | 0.18% | 67% | 0.34% | 4.9% |
| ODP (kg CFC-11 eq) | 8.88x10 ⁻⁸ | 3.95x10 ⁻⁸ | 1.15x10 ⁻⁸ | 6.97x10 ⁻⁸ | 5.86x10 ⁻¹⁰ | 4.43x10 ⁻⁷ | 7.94x10 ⁻⁹ | 3.20x10 ⁻⁹ |
| | 13% | 5.9% | 1.7% | 11% | 0.088% | 67% | 1.2% | 0.48% |
| AP (kg SO ₂ eq) | 1.03x10 ⁻² | 7.78x10 ⁻⁴ | 3.36x10 ⁻⁴ | 1.37x10 ⁻³ | 1.96x10 ⁻⁵ | 2.64x10 ⁻² | 1.98x10 ⁻⁴ | 2.58x10 ⁻⁴ |
| | 26% | 2% | 0.85% | 3.5% | 0.049% | 67% | 0.5% | 0.65% |
| EP (kg N eq) | 6.13x10 ⁻³ | 1.98x10 ⁻⁴ | 2.64x10 ⁻⁴ | 3.49x10 ⁻⁴ | 8.31x10 ⁻⁵ | 2.41x10 ⁻² | 2.60x10 ⁻⁵ | 5.02x10 ⁻³ |
| | 17% | 0.55% | 0.73% | 0.96% | 0.23% | 67% | 0.072% | 14% |
| SFP (kg O ₃ eq) | 0.125 | 1.85x10 ⁻² | 4.88x10 ⁻³ | 3.27x10 ⁻² | 4.36x10 ⁻⁴ | 0.381 | 5.59x10 ⁻³ | 3.37x10 ⁻³ |
| | 22% | 3.2% | 0.85% | 5.7% | 0.076% | 67% | 0.98% | 0.59% |
| FFD (MJ eq) | 7.29 | 0.336 | 0.146 | 0.593 | 4.95x10 ⁻³ | 16.9 | 6.63x10 ⁻² | 2.97x10 ⁻² |
| | 29% | 1.3% | 0.57% | 2.3% | 0.019% | 67% | 0.26% | 0.12% |

Table 20. Resource use and waste flows for the Aerocel® Aeroseal LVOC™ Black products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

| Parameter | A1 | A2 | A3 | A4 | A5 | B4 | C2 | C4 |
|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Resources | | | | | | | | |
| RPR _E (MJ) | 0.764 | 2.77x10 ⁻² | 0.357 | 4.89x10 ⁻² | 3.52x10 ⁻⁴ | 2.42 | 1.73x10 ⁻³ | 1.05x10 ⁻² |
| | 21% | 0.76% | 9.8% | 1.3% | 0.0097% | 67% | 0.048% | 0.29% |
| RPR _M (MJ) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| NRPR _E (MJ) | INA | INA | INA | INA | INA | INA | INA | INA |
| NRPR _M (MJ) | INA | INA | INA | INA | INA | INA | INA | INA |
| SM (kg) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| RSF/NRSF (MJ) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |
| RE (MJ) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |
| FW (m ³) | 0.101 | 1.81x10 ⁻³ | 8.12x10 ⁻³ | 3.20x10 ⁻³ | 2.85x10 ⁻⁵ | 0.231 | 1.54x10 ⁻⁴ | 9.95x10 ⁻⁴ |
| | 29% | 0.52% | 2.3% | 0.93% | 0.0083% | 67% | 0.045% | 0.29% |
| Wastes | | | | | | | | |
| HWD (kg) | 1.39x10 ⁻⁵ | 6.68x10 ⁻⁶ | 1.51x10 ⁻⁶ | 1.18x10 ⁻⁵ | 9.15x10 ⁻⁸ | 7.21x10 ⁻⁵ | 1.27x10 ⁻⁶ | 8.64x10 ⁻⁷ |
| | 13% | 6.2% | 1.4% | 11% | 0.085% | 67% | 1.2% | 0.8% |
| NHWD (kg) | 0.125 | 0.120 | 1.02x10 ⁻² | 0.211 | 1.15x10 ⁻² | 2.28 | 2.22x10 ⁻³ | 0.658 |
| | 3.7% | 3.5% | 0.3% | 6.2% | 0.34% | 67% | 0.065% | 19% |
| HLRW (kg) | 2.96x10 ⁻⁶ | 1.36x10 ⁻⁷ | 1.49x10 ⁻⁶ | 2.40x10 ⁻⁷ | 1.85x10 ⁻⁹ | 9.79x10 ⁻⁶ | 7.90x10 ⁻⁹ | 5.66x10 ⁻⁸ |
| | 20% | 0.93% | 10% | 1.6% | 0.013% | 67% | 0.054% | 0.39% |
| ILLRW (kg) | 2.54x10 ⁻⁵ | 1.65x10 ⁻⁵ | 8.32x10 ⁻⁶ | 2.92x10 ⁻⁵ | 2.44x10 ⁻⁷ | 1.68x10 ⁻⁴ | 3.33x10 ⁻⁶ | 1.23x10 ⁻⁶ |
| | 10% | 6.5% | 3.3% | 12% | 0.097% | 67% | 1.3% | 0.49% |
| CRU (kg) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| MR (kg) | 0.00 | 0.00 | 0.00 | 0.00 | 4.21x10 ⁻² | 0.144 | 0.00 | 3.01x10 ⁻² |
| | 0% | 0% | 0% | 0% | 19% | 67% | 0% | 14% |
| MER (kg) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |
| EE (MJ) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |

INA = Indicator not assessed | Neg. = Negligible

Table 21. Life Cycle Impact Assessment (LCIA) results for the Aerocel® Aerocoat™ products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

| Impact Category | A1 | A2 | A3 | A4 | A5 | B4 | C2 | C4 |
|---|-----------------------|------------------------|-----------------------|------------------------|------------------------|-----------------------|------------------------|------------------------|
| CML-IA | | | | | | | | |
| GWP (kg CO ₂ eq) | 1.93 | 1.73x10 ⁻² | 0.289 | 0.438 | 5.27x10 ⁻² | 6.95 | 4.90x10 ⁻² | 0.697 |
| | 19% | 0.17% | 2.8% | 4.2% | 0.51% | 67% | 0.47% | 6.7% |
| ODP (kg CFC-11 eq) | 1.78x10 ⁻⁷ | 2.97x10 ⁻⁹ | 1.11x10 ⁻⁸ | 7.69x10 ⁻⁸ | 9.81x10 ⁻¹⁰ | 5.64x10 ⁻⁷ | 8.53x10 ⁻⁹ | 3.57x10 ⁻⁹ |
| | 21% | 0.35% | 1.3% | 9.1% | 0.12% | 67% | 1% | 0.42% |
| AP (kg SO ₂ eq) | 1.30x10 ⁻² | 1.80x10 ⁻⁴ | 9.24x10 ⁻⁴ | 1.72x10 ⁻³ | 2.99x10 ⁻⁵ | 3.25x10 ⁻² | 2.29x10 ⁻⁴ | 1.81x10 ⁻⁴ |
| | 27% | 0.37% | 1.9% | 3.5% | 0.061% | 67% | 0.47% | 0.37% |
| EP (kg (PO ₄) ³⁻ eq) | 4.01x10 ⁻³ | 2.62x10 ⁻⁵ | 4.13x10 ⁻⁴ | 4.09x10 ⁻⁴ | 2.32x10 ⁻⁴ | 1.64x10 ⁻² | 4.94x10 ⁻⁵ | 3.08x10 ⁻³ |
| | 16% | 0.11% | 1.7% | 1.7% | 0.94% | 67% | 0.2% | 12% |
| POCP (kg C ₂ H ₄ eq) | 1.25x10 ⁻³ | 5.10x10 ⁻⁶ | 6.24x10 ⁻⁵ | 5.98x10 ⁻⁵ | 4.77x10 ⁻⁶ | 2.98x10 ⁻³ | 7.57x10 ⁻⁶ | 9.72x10 ⁻⁵ |
| | 28% | 0.11% | 1.4% | 1.3% | 0.11% | 67% | 0.17% | 2.2% |
| ADPE (kg Sb eq) | 6.60x10 ⁻⁹ | 1.45x10 ⁻¹¹ | 1.09x10 ⁻⁹ | 4.50x10 ⁻¹⁰ | 3.35x10 ⁻¹² | 1.64x10 ⁻⁸ | 1.34x10 ⁻¹¹ | 5.80x10 ⁻¹¹ |
| | 27% | 0.059% | 4.4% | 1.8% | 0.014% | 67% | 0.054% | 0.23% |
| ADPF (MJ eq) | 21.9 | 0.246 | 6.29 | 6.47 | 8.05x10 ⁻² | 72.1 | 0.670 | 0.357 |
| | 20% | 0.23% | 5.8% | 6% | 0.074% | 67% | 0.62% | 0.33% |
| TRACI 2.1 | | | | | | | | |
| GWP (kg CO ₂ eq) | 1.91 | 1.73x10 ⁻² | 0.284 | 0.437 | 5.06x10 ⁻² | 6.79 | 4.89x10 ⁻² | 0.649 |
| | 19% | 0.17% | 2.8% | 4.3% | 0.5% | 67% | 0.48% | 6.4% |
| ODP (kg CFC-11 eq) | 2.11x10 ⁻⁷ | 3.95x10 ⁻⁹ | 1.41x10 ⁻⁸ | 1.02x10 ⁻⁷ | 1.30x10 ⁻⁹ | 6.97x10 ⁻⁷ | 1.14x10 ⁻⁸ | 4.61x10 ⁻⁹ |
| | 20% | 0.38% | 1.3% | 9.8% | 0.12% | 67% | 1.1% | 0.44% |
| AP (kg SO ₂ eq) | 1.36x10 ⁻² | 1.96x10 ⁻⁴ | 9.84x10 ⁻⁴ | 2.02x10 ⁻³ | 4.14x10 ⁻⁵ | 3.50x10 ⁻² | 2.83x10 ⁻⁴ | 3.75x10 ⁻⁴ |
| | 26% | 0.37% | 1.9% | 3.8% | 0.079% | 67% | 0.54% | 0.71% |
| EP (kg N eq) | 8.89x10 ⁻³ | 2.20x10 ⁻⁵ | 8.42x10 ⁻⁴ | 5.12x10 ⁻⁴ | 6.31x10 ⁻⁴ | 3.83x10 ⁻² | 3.72x10 ⁻⁵ | 8.22x10 ⁻³ |
| | 15% | 0.038% | 1.5% | 0.89% | 1.1% | 67% | 0.065% | 14% |
| SFP (kg O ₃ eq) | 0.129 | 3.91x10 ⁻³ | 1.30x10 ⁻² | 4.80x10 ⁻² | 1.01x10 ⁻³ | 0.415 | 8.00x10 ⁻³ | 4.94x10 ⁻³ |
| | 21% | 0.63% | 2.1% | 7.7% | 0.16% | 67% | 1.3% | 0.79% |
| FFD (MJ eq) | 1.92 | 3.34x10 ⁻² | 0.803 | 0.869 | 1.12x10 ⁻² | 7.54 | 9.49x10 ⁻² | 4.29x10 ⁻² |
| | 17% | 0.3% | 7.1% | 7.7% | 0.099% | 67% | 0.84% | 0.38% |

Table 22. Resource use and waste flows for the Aerocel® Aerocoat™ products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

| Parameter | A1 | A2 | A3 | A4 | A5 | B4 | C2 | C4 |
|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Resources | | | | | | | | |
| RPR _E (MJ) | 1.50 | 2.44x10 ⁻³ | 0.361 | 7.18x10 ⁻² | 6.81x10 ⁻⁴ | 3.91 | 2.47x10 ⁻³ | 1.38x10 ⁻² |
| | 26% | 0.042% | 6.2% | 1.2% | 0.012% | 67% | 0.042% | 0.24% |
| RPR _M (MJ) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| NRPR _E (MJ) | INA | INA | INA | INA | INA | INA | INA | INA |
| NRPR _M (MJ) | INA | INA | INA | INA | INA | INA | INA | INA |
| SM (kg) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| RSF/NRSF (MJ) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |
| RE (MJ) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |
| FW (m ³) | 0.145 | 1.57x10 ⁻⁴ | 1.43x10 ⁻² | 4.70x10 ⁻³ | 6.37x10 ⁻⁵ | 0.331 | 2.20x10 ⁻⁴ | 1.39x10 ⁻³ |
| | 29% | 0.032% | 2.9% | 0.95% | 0.013% | 67% | 0.044% | 0.28% |
| Wastes | | | | | | | | |
| HWD (kg) | 2.63x10 ⁻⁵ | 5.45x10 ⁻⁷ | 2.26x10 ⁻⁶ | 1.73x10 ⁻⁵ | 2.23x10 ⁻⁷ | 9.91x10 ⁻⁵ | 1.82x10 ⁻⁶ | 1.12x10 ⁻⁶ |
| | 18% | 0.37% | 1.5% | 12% | 0.15% | 67% | 1.2% | 0.75% |
| NHWD (kg) | 0.763 | 8.86x10 ⁻³ | 3.02x10 ⁻² | 0.310 | 5.51x10 ⁻² | 4.25 | 3.17x10 ⁻³ | 0.956 |
| | 12% | 0.14% | 0.47% | 4.9% | 0.86% | 67% | 0.05% | 15% |
| HLRW (kg) | 6.18x10 ⁻⁶ | 1.15x10 ⁻⁸ | 3.53x10 ⁻⁷ | 3.53x10 ⁻⁷ | 3.44x10 ⁻⁹ | 1.40x10 ⁻⁵ | 1.13x10 ⁻⁸ | 7.37x10 ⁻⁸ |
| | 29% | 0.055% | 1.7% | 1.7% | 0.016% | 67% | 0.054% | 0.35% |
| ILLRW (kg) | 5.41x10 ⁻⁵ | 1.65x10 ⁻⁶ | 3.17x10 ⁻⁶ | 4.28x10 ⁻⁵ | 5.39x10 ⁻⁷ | 2.18x10 ⁻⁴ | 4.76x10 ⁻⁶ | 1.76x10 ⁻⁶ |
| | 17% | 0.51% | 0.97% | 13% | 0.17% | 67% | 1.5% | 0.54% |
| CRU (kg) | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| MR (kg) | 0.00 | 0.00 | 0.00 | 0.00 | 4.53x10 ⁻² | 0.138 | 0.00 | 2.38x10 ⁻² |
| | 0% | 0% | 0% | 0% | 22% | 67% | 0% | 11% |
| MER (kg) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |
| EE (MJ) | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. | Neg. |

6. LCA: Interpretation

The interpretation phase conforms to ISO 14044 with further guidance from the ILCD General Guide for Life Cycle Assessment. The interpretation included the use of evaluation and sensitivity checks to steer the iterative process during the assessment, and a final evaluation including completeness, sensitivity, and consistency checks, at the end of the study.

The contributions to total impact indicator results are dominated by the product replacement phase (B4) of the assessment which account for approximately 67% of total impacts. Of the remaining life cycle phases, the raw material extraction and processing phase is generally the largest contributor to the overall impacts, followed by product manufacturing (A3), product distribution (A4) and upstream material transport (A2). Other life cycle phase contributions are minimal.

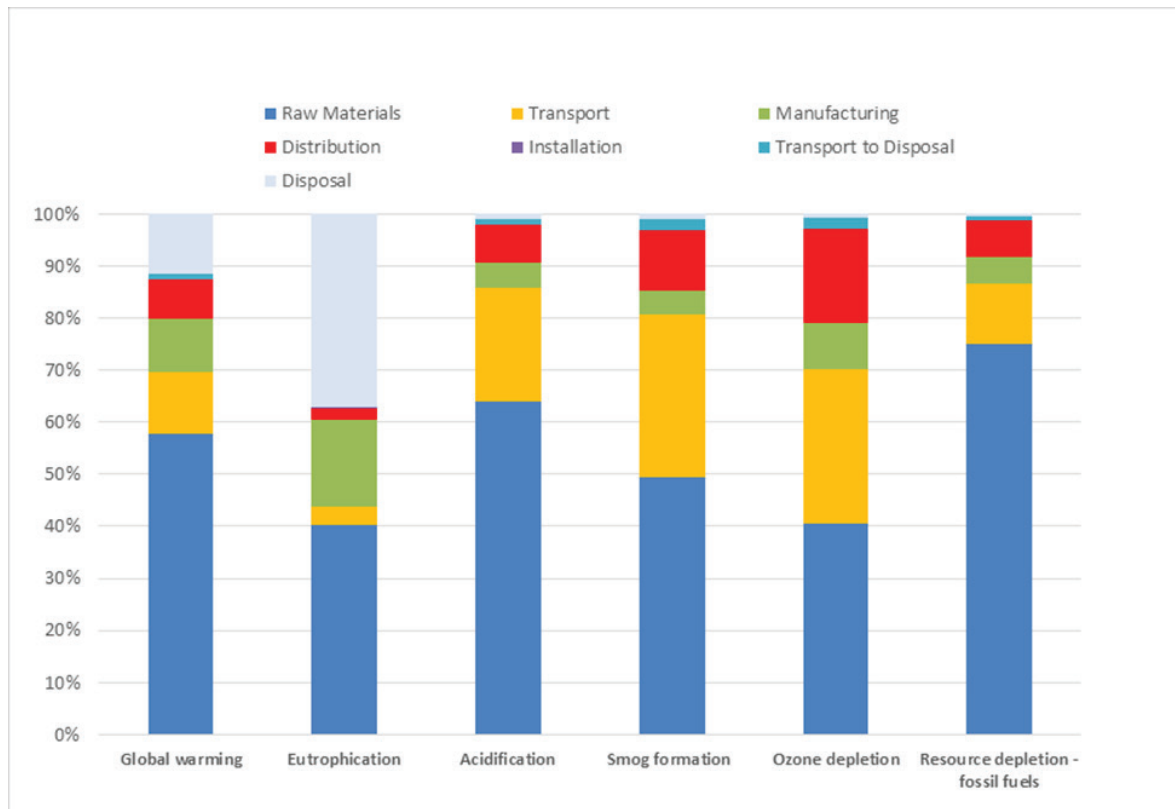


Figure 3. Contribution analysis for the Aeroflex® Cel-Link II® products – TRACI 2.1. (Excluding product replacements)

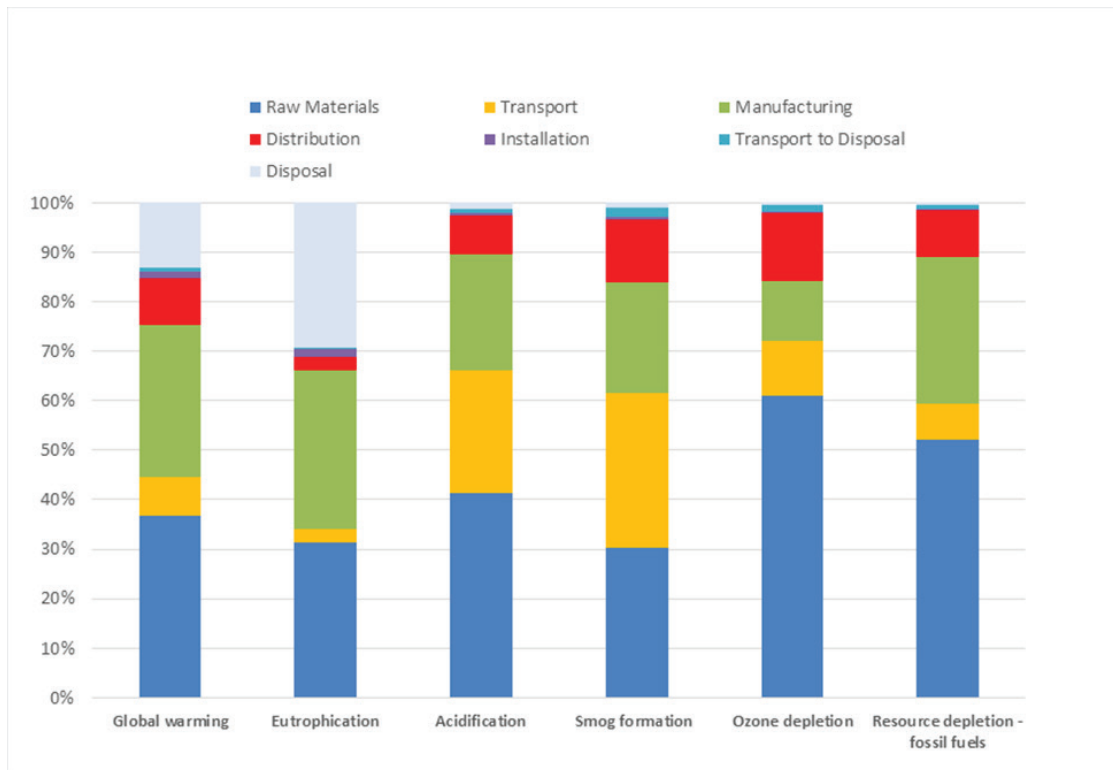


Figure 4. Contribution analysis for the Aerocel® Protape® products – TRACI 2.1. (Excluding product replacements)

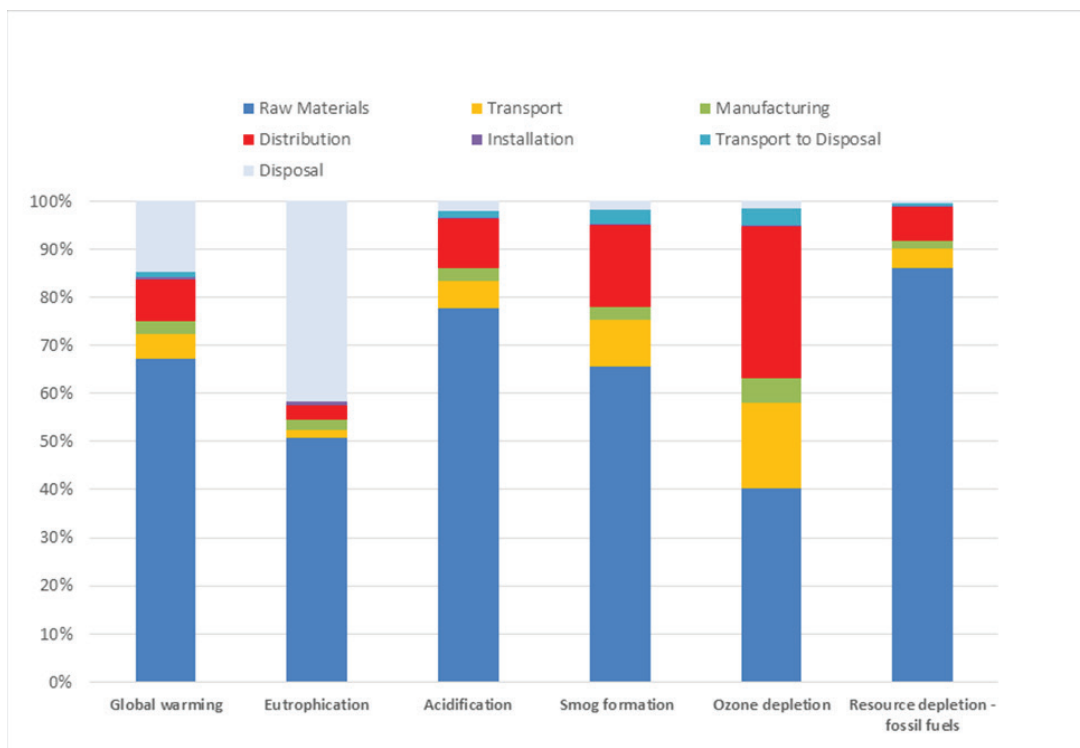


Figure 5. Contribution analysis for the Aerocel® Aeroseal LVOC™ Black products – TRACI 2.1. (Excluding product replacements)

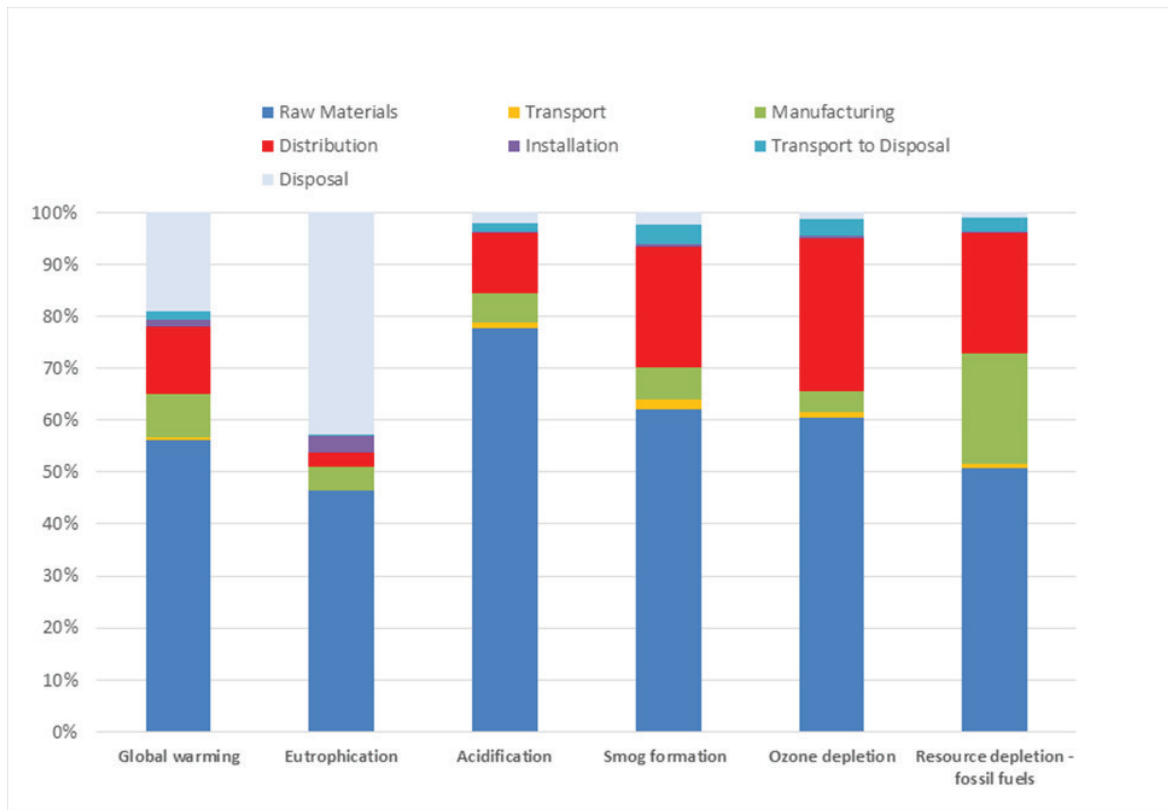


Figure 6. Contribution analysis for the Aerocel® Aerocoat™ products – TRACI 2.1. (Excluding product replacements)

7. Additional Environmental Information

Aeroflex USA does not use CFCs, HFCs, or HCFCs in its manufacturing process.

8. References

1. Life Cycle Assessment of Aeroflex's Rubber Insulation Products. SCS Global Services Report. Prepared for Aeroflex USA. June 2021.
2. ISO 14025:2006 Environmental labels and declarations – Type III environmental declarations – Principles and Procedures.
3. ISO 14040:2006/Amd. 1:2020 Environmental Management – Life cycle assessment – Principles and Framework
4. ISO 14044:2006/Amd. 1: 2017/Amd. 2::2020 Environmental Management – Life cycle assessment – Requirements and Guidelines.
5. ISO 21930: 2017 Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services.
6. SCS Type III Environmental Declaration Program: Program Operator Manual. V10.0 April 2019. SCS Global Services.
7. Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI). Dr. Bare, J., <https://www.epa.gov/chemical-research/tool-reduction-and-assessment-chemicals-and-other-environmental-impacts-traci>
8. CML-IA Characterization Factors. Leiden University, Institute of Environmental Sciences. April 2013. <http://cml.leiden.edu/software/data-cmlia.html>
9. Ecoinvent Centre (2019) ecoinvent data from v3.6. Swiss Center for Life Cycle Inventories, Dübendorf, 2019, <http://www.ecoinvent.org>
10. European Joint Research Commission. International Reference Life Cycle Data System handbook. *General guide for Life Cycle Assessment – Detailed Guidance*. © European Union, 2010.



For more information, contact:

Aeroflex USA

Aeroflex USA
282 Industrial Park Rd,
Sweetwater, TN 37874 United States
www.aeroflexusa.com | +1.423.337.2493



SCS Global Services

2000 Powell Street, Ste. 600, Emeryville, CA 94608 USA
Main +1.510.452.8000 | fax +1.510.452.8001